

Rackmount Light

with power distribution

rackmount light with power distribution

features:

- Retractable LED light
- Dimmable LED bar provides evenly distributed illumination for component viewing
- 2 rear USB style output ports for connection of LED gooseneck work lights
- 8 circuit-breaker protected NEMA 5-15R rear outlets
- 2 stage surge suppression protects against damage from power surges and spikes (status notification via local LED and dry contact warns when surge protection is compromised, PDLT-815RV-RN only)
- Constructed of 18-gauge steel
- "Clean ground" surge suppressor design will not pass noise contamination to the ground
- Face available with flat black powder coat finish (PDLT-815RV-RN), black brushed anodized finish (PDLT-815RVA)
- ETL Listed in the US and Canada

PDLT-815RV-RN



PDLT-815RVA



specifications:

PDLT-815RV-RN

Rackmount light with power distribution, normally open dry contact closure for remote surge suppression status notification to customer supplied monitoring device and LED status indicators shall be Middle Atlantic Products model #PDLT-815RV-RN. Rackmount power shall have a 15 amp capacity, 2 stage, normal mode, surge and spike protection and EMI filtering. Rackmount power / light unit shall operate on 120 volt nominal AC/60Hz power. Rackmount power / light unit shall include 9' (14-3) SignalSAFE™ power cord with NEMA 5-15P plug with 8 rear NEMA 5-15R outlets and 15 amp circuit breaker located on the front. Rackmount power shall feature retractable light shelf with 20 lb. weight capacity and LED light bar. Unit shall include dimmer (front mounted knob.) "Clean ground" surge suppressor design shall not pass noise contamination to the ground. Unit shall occupy one rackspace and be constructed of 18-gauge steel with a flat black powder coat finish. Rackmount power / light unit shall feature 2 rear USB style output ports for use with optional LED gooseneck work lights. Rackmount power / light unit shall be warranted to be free from defects in material or workmanship under normal use and conditions for a period of three years. Rackmount power / light shall be manufactured by an ISO 9001 Registered Company. Rackmount power / light shall comply with the requirements of RoHS EU Directive 2011/95/EC. Rackmount power/light unit shall be ETL listed to UL standard 1419, UL 60950-1 and UL 60065 in the US; CSA standard 60950-1, and CSA C22.2 No. 60065 in Canada. Rackmount power / light shall be warranted to be free from defects in materials and workmanship under normal use and conditions for a period of 3 years.

PDLT-815RVA

Rackmount light with power distribution shall be Middle Atlantic Products model # PDLT-815RVA. Rackmount power shall have a 15 amp capacity, 2 stage, normal mode, surge and spike protection and EMI filtering. Rackmount power / light unit shall operate on 120 volt nominal AC/60Hz power. Rackmount power / light unit shall include 9' (14-3) SignalSAFE™ power cord with NEMA 5-15P plug with 8 NEMA 5-15R outlets and 15 amp circuit breaker located on the front. Rackmount power shall feature retractable light shelf with 20 lb. weight capacity and LED light bar. Unit shall include dimmer button under light shelf. Second dimmer button shall control brightness of the lighted logo. "Clean ground" surge suppressor design shall not pass noise contamination to the ground. Unit shall occupy one rackspace and be constructed of 18-gauge steel. Rackmount power / light unit shall feature 2 rear USB style output ports for use with optional LED gooseneck work lights. Rackmount power / light unit shall be warranted to be free from defects in material or workmanship under normal use and conditions for a period of three years. Rackmount power / light shall be manufactured by an ISO 9001 Registered Company. Rackmount power / light shall comply with the requirements of RoHS EU Directive 2011/95/EC. Rackmount power/light unit shall be ETL listed to UL standard 1419, UL 60950-1 and UL 60065 in the US; CSA standard 60950-1, and CSA C22.2 No. 60065 in Canada. Rackmount power / light shall be warranted to be free from defects in materials

Customizable specification clips available at middleatlantic.com



options:

- LED work light with 11" flexible gooseneck and on/off switch shall be Middle Atlantic Products model # LT-GN

what great systems are built on.™

A brand of legrand




Middle Atlantic Products

middleatlantic.com | middleatlantic.com


PDLT

basic dimensions

all dimensions in inches unless otherwise noted [all dimensions in brackets are in millimeters]

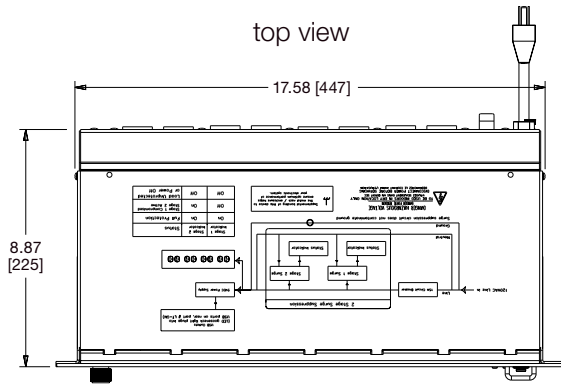


rear view

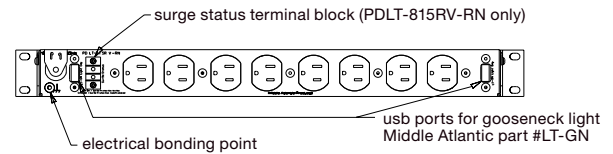


Surge Suppression Status		
Stage 1 Indicator	Stage 2 Indicator	Status
on	on	Full protection
off	on	Stage 1 compromised Stage 2 active
off	off	Load unprotected or power off

PDLT-815RVA
front view




PDLT-815RVA and PDLT-815RV-RN dimmer for light and logo is located under drawer, ref inst sheet I-00175


side view



PDLT-815RV-RN
front view



side view

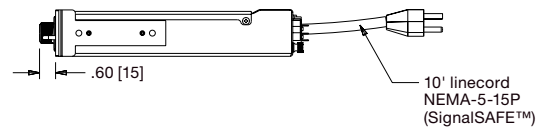

Note: UL File # E204950

Part#	Front Power Switch	Remote Notifier	Dimmable Logo	Finish
PDLT-815RV-RN	yes	yes	no	Flat black powder coat
PDLT-815RVA	no	no	yes	Black brushed anodized aluminum face

Maximum Derated Load (North America):
15 Amp Models: 12 Amps
20 Amp Models: 16 Amps

surge suppression & EMI filter specifications (PDLT-815RV / PDLT-815RVA)

- Maximum allowable voltage: 125 VAC (RMS)
 - Maximum continuous voltage differential applied between line and neutral
- Peak impulse current (8/20 micro seconds):
 - 30,000 Amps, one time
 - 19,500 Amps, two times within 5 minutes
 - 7,000 Amps, ten times within 2 minutes
 - Maximum peak impulse current pulse as defined between line and neutral
 - Maximum multiple impulse current derated per spec
- Protection mode: Line to Neutral
- Maximum clamping voltage: 545 Volts @ 100 Amps
- Response time: Instantaneous (Less than 1 nanosecond)
- EMI/RF Suppression: More than 20 db
 - Calculated line to neutral, 100 KHz to 1 MHz suppression based upon nominal impedance
- Surge energy dissipation: 711 Joules (10 / 100 micro seconds)
- 2 Stage surge suppression with health indicators
- Surge suppression circuit does not contaminate ground